


MEC-CAN-2F02i

M.2 2280 (B+M key) dual isolated CAN bus
FD/2.0B board ($-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$)

Product Datasheet

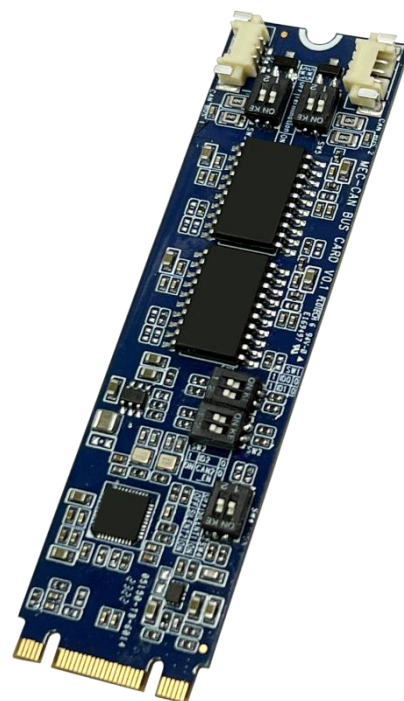

Date: 2025.09.03

Revision: 1.0

File: Cervoz_Modular_Expansion_Card_M.2_2280_B_M_CAN_FD_Datasheet_Rev1.0

Revision History

Date	Revision	Description
2025.09.03	1.0	First Released

Table of Contents

1. Product Overview.....	4
1.1 Introduction.....	4
1.2 Feature.....	4
2. Product Specifications.....	5
3. Dimensions.....	7
4. Package Checklist.....	8

1. Product Overview

1.1 Introduction

MEC-CAN-2F02i is a dual CAN bus module for embedded PC. The card follows the M.2 standard which is compliant with PCI Express x 1 classification and M.2 form factor. This board fits in any host computer that has M.2 slots.

MEC-CAN-2F02i provides two DB9 connectors that come with 11898-1 and 11898-2 layer protocol support of CAN FD and 2.0A/B. The wide operating temperature and 2.5kV isolation make MEC-CAN-2F02i suitable for use on harsh industrial environments.

MEC-CAN-2F02i is designed with flexibilities for many different application and accessories (bracket and DB9 cable) are included in the standard package.

1.2 Feature


- Single-Lane (x1) PCI-Express with throughput up to 5.0 / 2.5GT/s
- Fully compliant with PCI-Express Base Specification Rev. 2.0
- Meet the Requirements of the ISO 11898-1:2015
- Mixed CAN FD and CAN 2.0A/B mode
- Support baud rate 10/20/50/100/125/250/500/800/1000K
Support data(BRS) baud rate 1M/2M/4M/5M
- Support CAN message acceptance filter
- Compliant with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- Split Termination resistor enabled/disabled by switch
- Provide software SDK for Application layer develop
- Support 2.5kV isolated per port
- Support Linux SocketCAN

2. Product Specifications

General	
PCI-Express Revision	PCI-Express Base Specification Rev. 2.0
PCI-Express Electromechanical Revision	PCI-Express M.2 Electromechanical Rev. 1.1
Hardware	
Bus	Single-Lane (x1) PCI-Express with throughput up to 5.0/2.5GT/s
Output I/F	CAN FD 、CAN 2.0A/B
Interface (Connector)	
CAN bus	2 (DB9 male)
Communications	
Controller	F81601A
CAN Transceiver	ADM3057E
Protocol	CAN FD 、CAN 2.0A/B
Signal Support	CAN-H 、CAN-L
Speed	10/20/50/100/125/250/500/800/1M/2M/4M/5M
CAN Frequency	80MHz
Termination Resistor	120 OHM (split termination mode)
Serial Line Protection	
ESD Protection	15kV on board
Galvanic Isolation	
Voltage	2.5kV
Performance	
Baud Rate	up to 1Mbps
Power Requirement	
Power Consumption	MAX 3.3V @ 600mA
Dimensions	
Width x Length (mm)	22.00 x 80.00

Driver Support	
Operating Systems	Download driver and SDK Windows 11 Windows 10 32-Bit and 64-Bit Windows 8.1 32-Bit and 64-Bit Windows 8 32-Bit and 64-Bit Windows 7 32-Bit and 64-Bit Linux Kernel 3.4 and above
Environmental Limits	
Operating Temperature	-40 ~ 85°C
Storage Temperature	-40 ~ 95°C
Humidity (non-condensing)	5% ~ 95%
Regulatory Approvals	
EMC	CE, FCC, UKCA
EMI	EN 55022, EN61000-3-2, EN61000-3-3, FCC Part 15 Subpart B Class B
EMS	EN 55035, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 IEC 62368-1
Reliability	
Warranty	3 years
MTBF	>20,161,919

3. Dimensions

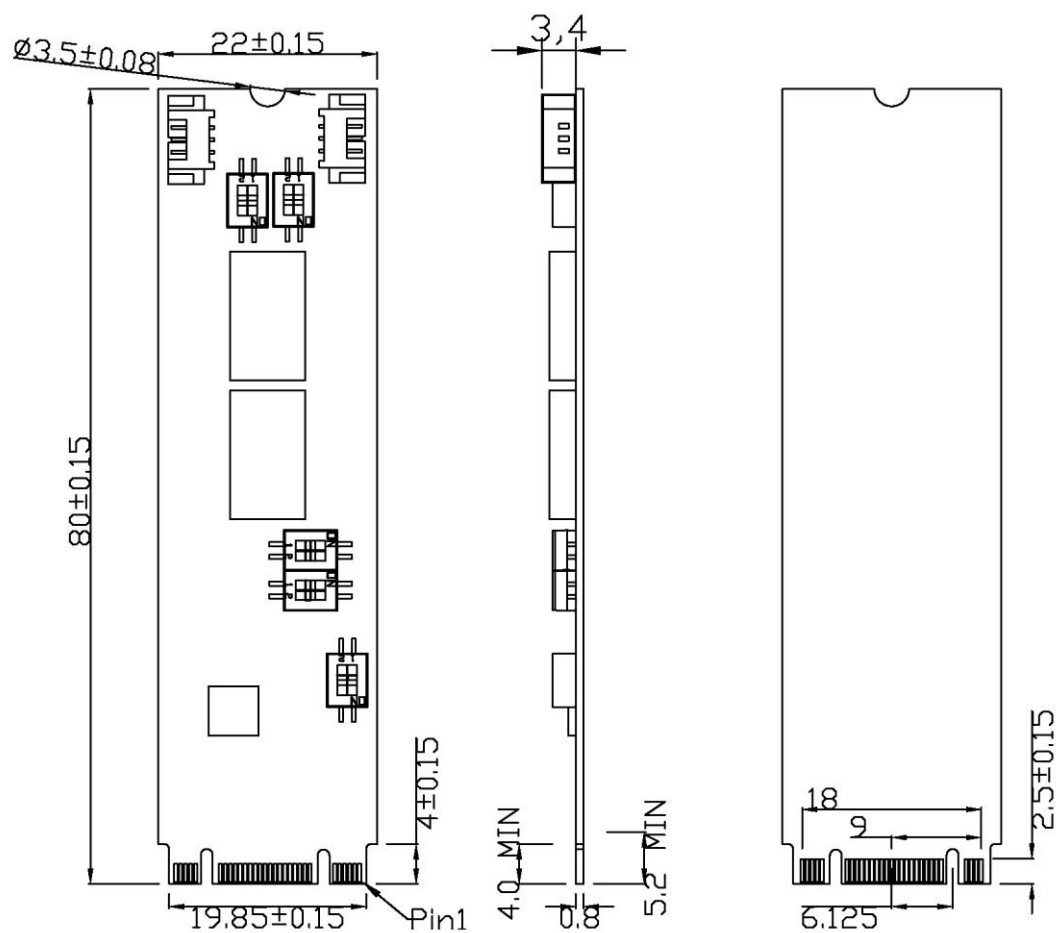

4. Package Checklist

- M.2 2280 Card x 1
- Bracket x 1
- DB9 Male Cable (30cm) x 2
- Quick Installation Guide (Printed) x 1

